

# INTERTON | STEP



MINI BTE MODEL

## For a life on the GO

Intuitive and wireless, Interton Step hearing aids bring back the sounds your customers enjoy, in every situation. Innovative features such as Personal Noise Reduction, Environmental Gain Tuner and Ear-to-ear communication available in a wide variety of models make Interton Step perfectly suited for up to 90% of people with hearing loss. With compatibility to the new 2nd generation Wireless Accessories you can offer a complete hearing system that gives your customers an enjoyable life.


## Standard Configuration

- Connectivity to wireless accessories
- Wireless ear-to-ear communication
- Nano Coating technology
- Supports Open and Closed configurations
- Push button for program changes
- Size 312 battery
- Battery door with integrated On/Off switch
- 5 different colors
- Telecoil with T and MT modes
- Direct Audio Input
- Supports various domes and ear hooks for comfortable fit

## Fitting Requirements

- Interton Appraise 2.4 Fitting Software (or higher)
- Programming adaptor with CS44 socket cable
- Fitting interface (see table)

## Fitting Range

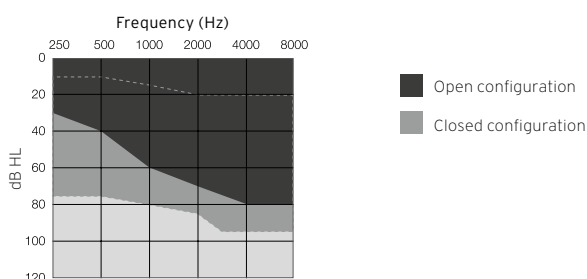

## Model Overview

ST665-DW

ST465-DW

ST265-DW

SOUND PROCESSING	Step 6	Step 4	Step 2
Logarithmic WDRC, number of channels	17	14	12
Gain Handles in FSW	9	7	6
Total comfort programs	4	4	3
<b>BASICS</b>			
Signal tones	●	●	●
Power-on Delay	●	●	●
<b>NOISE REDUCTION</b>			
Microphone Noise Reduction	●	⊙	○
Adaptive Noise Reduction	●	⊙	○
Personal Noise Reduction	●	●	-
Adaptive Wind Noise Reduction	●	⊙	○
<b>SPEECH UNDERSTANDING</b>			
Integrated Directionality	●	-	-
Fixed Directionality	●	●	●
Omni Directionality	●	●	●
Speech-Focused Directionality	●	●	●
Auto-Steered Directionality	●	●	●
Selectable Beam Width	●	●	○
SoundScape technology	●	●	●
<b>FEEDBACK MANAGEMENT</b>			
Feedback Manager Plus	●	●	●
Feedback Manager Plus - Music Mode	●	●	-
Pre-set Feedback Manager	●	●	●
Fitting Protection	●	●	●
<b>PROTECTION</b>			
Nano coating	●	●	●
<b>SPECIALS</b>			
Datalogging	●	●	●
AutoPhone	●	●	●
Environmental Gain Tuner	●	⊙	○
In-situ	●	●	●
<b>2.4 GHZ WIRELESS TECHNOLOGY</b>			
ear-to-ear communication	●	●	●
Volume Control synchronization	●	●	●
Push Button synchronization	●	●	●
Comfort Phone	●	●	●
Wireless Phone Clip	●	●	-
Wireless Remote Control	●	●	●
Wireless TV Streamer	●	●	-
<b>FITTING INTERFACE</b>			
Wireless fitting with Airlink	●	●	●
Hi-Pro	●	●	●
NOAHlink	●	●	●
SpeedLink	●	●	●

○ Standard

⊙ Advanced

● Ultimate

## Technical specifications

		Open		Closed		
		IEC 60118-0 IEC 711 Ear simulator	IEC 60118-7 ANSI S3.22 2cc coupler	IEC 60118-0 IEC 711 Ear simulator	IEC 60118-7 ANSI S3.22 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	40	36	45	40	dB
Full-on gain (50 dB SPL input)	Max.	57	51	64	55	dB
	1600 Hz/HFA	52	46	56	49	
Maximum output (90 dB SPL input)	Max.	123	117	132	122	dB SPL
	1600 Hz/HFA	118	112	125	117	
Total harmonic distortion	500Hz	1.2	0.8	2.2	1.8	%
	800 Hz	0.5	0.2	2.3	1.5	
	1600 Hz	1.0	0.5	0.7	0.5	
Telecoil sensitivity (1 mA/m input)	Max.	86	-	94	-	dB SPL
Full-on Telecoil sensitivity @ 1mA/m	1600 Hz / HFA	79	73	82	77	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	-	95	-	98	
Equivalent input noise w/o noise reduction		25	22	24	22	dB SPL
1/3 Octave equivalent input noise, w/o noise reduction	1600 Hz	11	-	11	-	
Frequency range (DIN 45605)		100-7130	100-7040	100-7150	100-7110	Hz
Current drain (quiescent / operating)		1.1 / 1.2	1.1 / 1.2	1.1 / 1.2	1.1 / 1.2	mA

Data in accordance with IEC 60118-0, IEC 60118-7, Supply Voltage 1.3V.

Patents pending

All specifications are subject to change without notice

400286000-GB16.02-Rev.B

