



Product Description

Interton Share™ is a family of hearing devices that are reliable, easy to use and bring great listening experiences to people - at a very affordable price. It's available in different styles and power options to suit your customers' individual needs.

Standard Configuration

- Faceplate and electronics with Nano Coating technology
- Size 312 battery
- Battery door with integrated on/off switch
- Supports StepVent
- Available in color 'Light'
- AutoPhone functionality
- Push button
- Analogue Volume Control (optional)
- Telecoil (optional)


Fitting Requirements

- Appraise 2.1 Fitting Software or higher
- CS63 Flex cable (3-pin) and a 312 battery
- Speedlink™, HI-PRO or NoahLink interface (Speedlink recommended)

SR1330-DP, SR1330-D, SR1330-P, SR1330, SR1230-DP, SR1230-D, SR1230-P, SR1230, SR1130-P, SR1130

	Interton Share 1.3	Interton Share 1.2	Interton Share 1.1
Sound processing			
Logarithmic WDRC - Channels	8	6	4
Gain Handles	6	4	4
Microphone Noise Reduction	●	●	-
Adaptive Noise Reduction (-3dB)	●	●	-
Basics			
Signal tones	●	●	●
Speech understanding			
Omni Directionality	●	●	●
Fixed Directionality	●	●	-
Speech-focused Directionality	●	-	-
Auto-steered Directionality	●	-	-
Open fitting (StepVent optional)	●	●	-
Feedback management			
Feedback Manager Plus	●	-	-
Feedback Manager	-	●	○
Ease of use/Customization			
Flexible Comfort programs	2	1	1
Total program choices	4	3	2
Data logging	●	-	-
AutoPhone	●	-	-
Protection			
Nano Coating technology	●	●	●

○ Share 1.1 HI is with single mic only

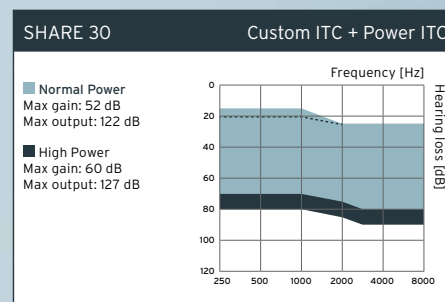







Technical specifications

		SRI1330-D, SR1330, SR1230-D, SR1230, SR1130		SRI1330-DP, SRI1330-P, SR1230-DP, SR1230-P, SR1130-P		
		IEC 60118-0 IEC 711 Ear simulator	IEC 60118-7 2cc coupler	IEC 60118-0 IEC 711 Ear simulator	IEC 60118-7 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	35	34	41	37	dB
Full-on gain (50 dB SPL input)	Max.	52	44	60	51	dB
	1600 Hz/HFA	46	40	54	47	
Maximum output (90 dB SPL input)	Max.	122	114	127	117	dB SPL
	1600 Hz/HFA	117	111	121	113	
Total harmonic distortion	500 Hz	0,4	0,6	0,6	0,5	%
	800 Hz	0,5	0,7	1,1	0,9	
	1600 Hz	0,4	0,6	0,7	0,8	
Telecoil sensitivity (1 mA/m input)	Max.	84	-	90	-	dB SPL
Full-on Telecoil sensitivity @ 1mA/m	1600 Hz /	78	71	84	78	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	-	95	-	98	
Equivalent input noise w/o noise reduction	1600 Hz	24	22	22	21	dB SPL
1/3 Octave equivalent input noise, w/o noise reduction		11	-	9	-	
Frequency range (DIN 45605)		100-7150	100-7110	100-7160	100-7120	Hz
Current Drain (Quiescent / Operating)		1,2 / 1,3	1,2 / 1,4	1,2 / 1,3	1,2 / 1,4	mA
Typical battery life time (battery type 312)		128	118	126	114	hrs

Data in accordance with IEC 60118-0, IEC 60118-7; Supply Voltage 1.3 V.

Patents pending

All specifications are subject to change without notice

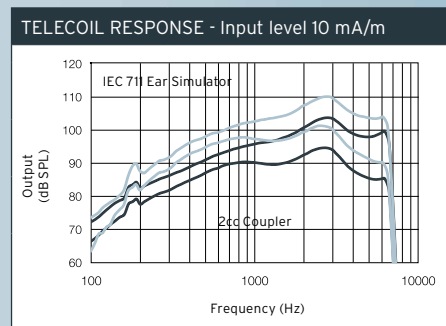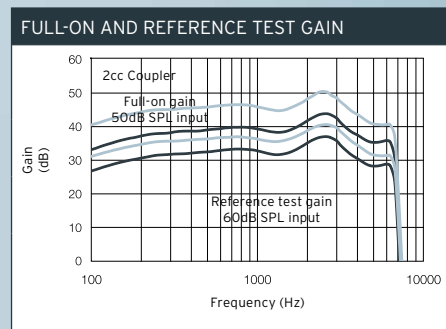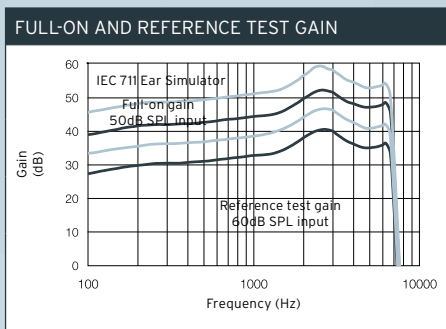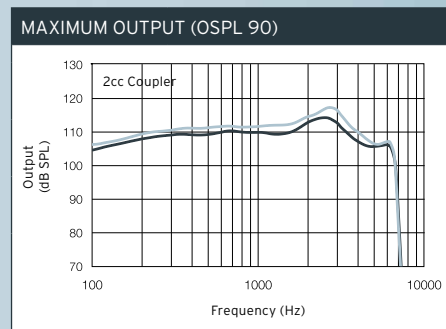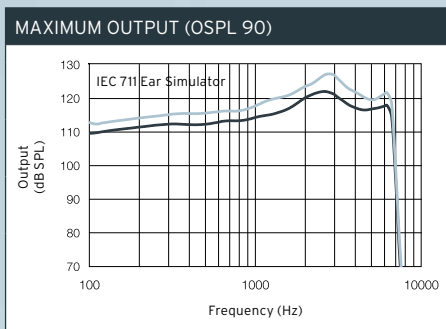

- High Power configuration
- Normal Power configuration