

INTERTON | SHARE



Product Description

Interton Share™ is a family of hearing devices that are reliable, easy to use and bring great listening experiences to people - at a very affordable price. It's available in different styles and power options to suit your customers' individual needs.

Standard Configuration

- Faceplate and electronics with Nano Coating technology
- Size 13 battery
- Push Button
- Battery door with integrated on/off switch
- Supports StepVent
- Available in color 'Light'
- AutoPhone functionality
- Telecoil
- Analogue Volume Control (optional)


Fitting Requirements

- Appraise 2.1 Fitting Software or higher
- CS63 Flex cable (3-pin) and a 13 battery
- Speedlink™, HI-PRO or NoahLink interface (Speedlink recommended)

SR1350-DP, SR1350-D, SR1350-P, SR1350, SR1250-DP, SR1250-D, SR1250-P, SR1250, SR1150-P, SR1150

	Interton Share 1.3	Interton Share 1.2	Interton Share 1.1
Sound processing			
Logarithmic WDRC - Channels	8	6	4
Gain Handles	6	4	4
Microphone Noise Reduction	●	●	-
Adaptive Noise Reduction (-3dB)	●	●	-
Basics			
Signal tones	●	●	●
Speech understanding			
Omni Directionality	●	●	●
Fixed Directionality	●	●	-
Speech-focused Directionality	●	-	-
Auto-steered Directionality	●	-	-
Open fitting (StepVent optional)	●	●	-
Feedback management			
Feedback Manager Plus	●	-	-
Feedback Manager	-	●	○
Ease of use/Customization			
Flexible Comfort programs	2	1	1
Total program choices	4	3	2
Data logging	●	-	-
AutoPhone	●	-	-
Protection			
Nano Coating technology	●	●	●

○ Share 1.1 HI is with single mic only

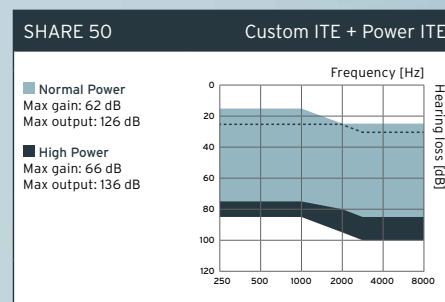







Technical specifications

		SR1350-D, SR1350, SR1250-D, SR1250, SR1150		SR1350-DP, SR1350-P, SR1250-DP, SR1250-P, SR1150-P		
		IEC 60118-0 IEC 711 Ear simulator	IEC 60118-7 2cc coupler	IEC 60118-0 IEC 711 Ear simulator	IEC 60118-7 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	39	37	48	47	dB
Full-on gain (50 dB SPL input)	Max.	62	52	66	57	dB
	1600 Hz/HFA	52	47	58	53	
Maximum output (90 dB SPL input)	Max.	126	117	136	129	dB SPL
	1600 Hz/HFA	119	113	135	124	
Total harmonic distortion	500 Hz	0,7	0,6	0,3	1,2	%
	800 Hz	1,2	0,9	0,7	1,3	
	1600 Hz	1,0	1,0	0,1	0,1	
Telecoil sensitivity (1 mA/m input)	Max.	91	-	97	-	dB SPL
Full-on Telecoil sensitivity @ 1mA/m	1600 Hz /	83	78	90	84	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	-	97	-	109	
Equivalent input noise w/o noise reduction	1600 Hz	27	23	25	24	dB SPL
1/3 Octave equivalent input noise, w/o noise reduction		12	-	13	-	
Frequency range (DIN 45605)		100-7160	100-7110	100-5130	100-4970	Hz
Current Drain (Quiescent / Operating)		1,2 / 1,3	1,2 / 1,4	1,2 / 1,2	1,2 / 1,4	mA
Typical battery life time (battery type 13)		232	207	234	213	hrs

Data in accordance with IEC 60118-0, IEC 60118-7, Supply Voltage 1.3 V.

Patents pending

All specifications are subject to change without notice

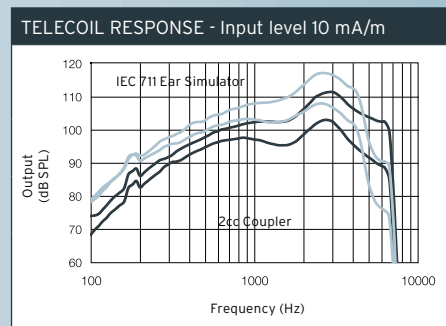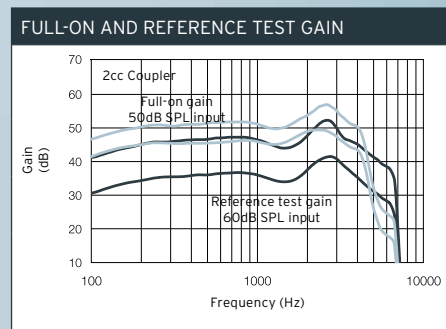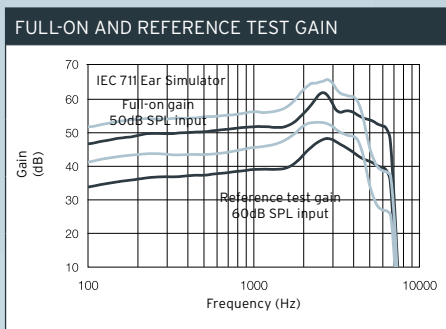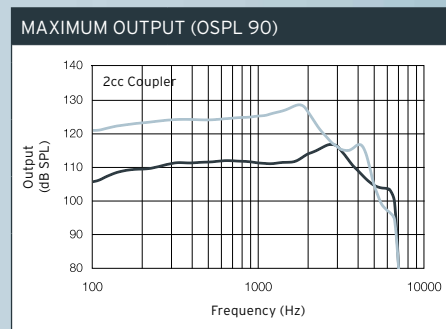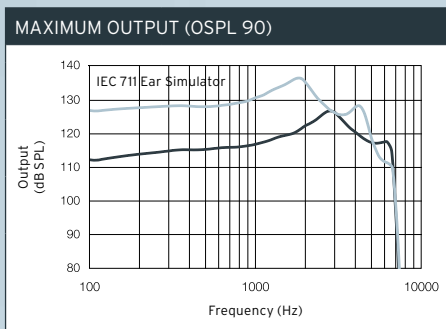

- High Power configuration
- Normal Power configuration