



## Product Description

Interton Share™ is a family of hearing devices that are reliable, easy to use and bring great listening experiences to people - at a very affordable price. It's available in different styles, colors and power options to suit your customers' individual needs.

## Standard Configuration

- Nano Coating technology
- Supports Open and Classic configurations
- Push button
- Analogue, numbered Volume Control
- Size 13 battery
- Battery door with integrated On/Off switch
- Up to 5 color options
- Telecoil with T and MT modes
- Direct Audio Input
- Supports Dome, Tulip-Dome, FlexVent and Standard Earmould
- Standard hook, mini hook and Thin Tube adaptor


## Fitting Requirements

- Appraise 2.1 Fitting Software or higher
- Programming adaptor with CS44 socket cable
- Speedlink™, HI-PRO or NoahLink interface (Speedlink recommended)

## STANDARD BTE SR1370-DVI, SR1270-DVI, SR1170-VI

	Interton Share 1.3	Interton Share 1.2	Interton Share 1.1
<b>Sound processing</b>			
Logarithmic WDRC - Channels	8	6	4
Gain Handles	6	4	4
Microphone Noise Reduction	●	●	-
Adaptive Noise Reduction (-3dB)	●	●	-
<b>Basics</b>			
Signal tones	●	●	●
<b>Speech understanding</b>			
Omni Directionality	●	●	●
Fixed Directionality	●	●	-
Open fitting	●	●	-
Speech-focused Directionality	●	-	-
Auto-steered Directionality	●	-	-
<b>Feedback management</b>			
Feedback Manager Plus	●	-	-
Feedback Manager	-	●	○
<b>Ease of use/Customization</b>			
Flexible Comfort programs	2	1	1
Total program choices	4	3	2
Data logging	●	-	-
AutoPhone	●	-	-
<b>Protection</b>			
Nano Coating technology	●	●	●

○ Share 1.1 HI is with single mic only

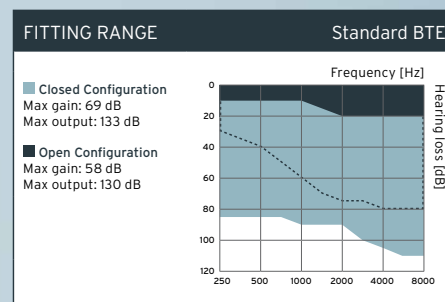







## Technical specifications

		IEC 60118-0 IEC 711 Ear simulator		IEC 60118-7:2005 2cc coupler		
		Open	Classic	Open	Classic	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	38	48	35	44	dB
Full-on gain (50 dB SPL input)	Max.	58	69	48	61	dB
	1600 Hz/HFA	47	60	42	56	
Maximum output (90 dB SPL input)	Max.	130	133	126	128	dB SPL
	1600 Hz/HFA	117	127	111	121	
Total harmonic distortion	500 Hz	0,3	1,4	0,2	1,2	%
	800 Hz	0,3	1,6	0,2	1,1	
	1600 Hz	0,4	0,7	0,2	0,5	
Telecoil sensitivity (1 mA/m input)	Max.	85	97	-	-	dB SPL
Full-on Telecoil sensitivity @ 1mA/m	1600 Hz / HFA	76	88	71	84	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	-	-	93	103	
Equivalent input noise w/o Noise reduction		30	29	27	25	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	14	15	-	-	
Frequency range (DIN 45605)		100-6060	130-6420	100-5840	100-6200	Hz
Current Drain (Quiescent / Operating)		1,28 / 1,29	1,29 / 1,3	1,28 / 1,31	1,28 / 1,31	mA
Typical Battery life time (Battery type 13)		225	223	221	221	hrs

Data in accordance with IEC 60118-0, IEC 60118-7, Supply Voltage 1.3 V.

Patents pending

All specifications are subject to change without notice

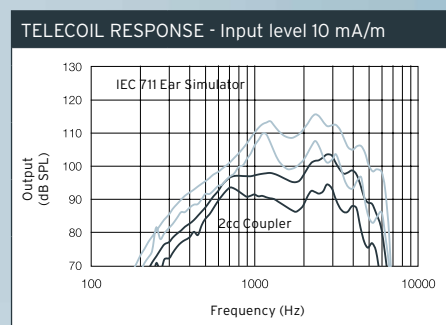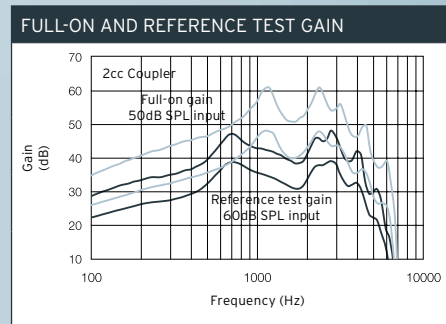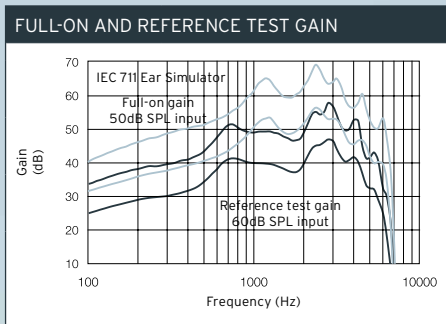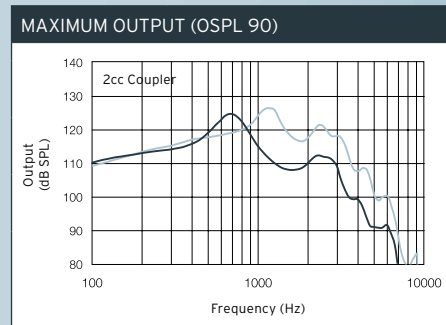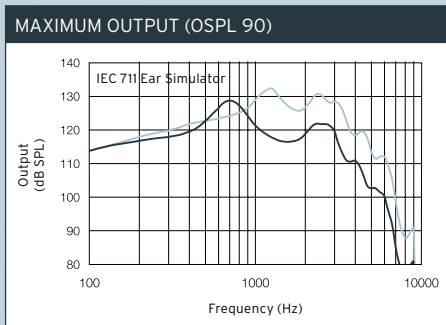

- Open configuration
- Classic configuration