

INTERTON | SHARE



Product Description

Interton Share™ is a family of hearing devices that are reliable, easy to use and bring great listening experiences to people - at a very affordable price. It's available in different styles, colors and power options to suit your customers' individual needs.

Standard Configuration

- Nano Coating technology
- Supports Classic configuration only
- Push button
- Analogue, numbered Volume Control
- Size 13 battery
- Battery door with integrated On/Off switch
- Up to 5 color options
- Telecoil with T and MT modes
- Direct Audio Input
- Supports Standard Earmould
- Standard hook, mini hook


Fitting Requirements

- Appraise 2.1 Fitting Software or higher
- Programming adaptor with CS44 socket cable
- Speedlink™, HI-PRO or NoahLink interface (Speedlink recommended)

SR1380-DVI, SR1280-DVI, SR1180-VI

	Interton Share 1.3	Interton Share 1.2	Interton Share 1.1
Sound processing			
Logarithmic WDRC - Channels	8	6	4
Gain Handles	6	4	4
Microphone Noise Reduction	●	●	-
Adaptive Noise Reduction (-3dB)	●	●	-
Basics			
Signal tones	●	●	●
Speech understanding			
Omni Directionality	●	●	●
Fixed Directionality	●	●	-
Speech-focused Directionality	●	-	-
Auto-steered Directionality	●	-	-
Open fitting	-	-	-
Feedback management			
Feedback Manager Plus	●	-	-
Feedback Manager	-	●	○
Ease of use/Customization			
Flexible Comfort programs	2	1	1
Total program choices	4	3	2
Data logging	●	-	-
AutoPhone	●	-	-
Protection			
Nano Coating technology	●	●	●

○ Share 1.1 HI is with single mic only

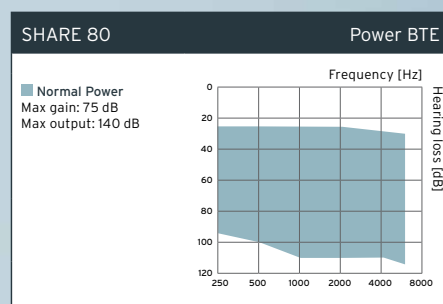





Technical specifications

SR1380-DVI, SR1280-DVI, SR1180-VI	
IEC 60118-0 IEC 711 Ear simulator	IEC 60118-7:2005 2cc coupler
Classic	Classic



Reference test gain (60 dB SPL input)	1600 Hz/HFA	55	53	dB
Full-on gain (50 dB SPL input)	Max.	75	67	dB
	1600 Hz/HFA	67	62	
Maximum output (90 dB SPL input)	Max.	140	136	dB SPL
	1600 Hz/HFA	135	129	
Total harmonic distortion	500 Hz	1,4	1,5	%
	800 Hz	0,5	0,3	
	1600 Hz	0,9	0,5	
Telecoil sensitivity (1 mA/m input)	Max.	105	-	dB SPL
Full-on Telecoil sensitivity @ 1mA/m	1600 Hz / HFA	98	93	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	-	114	
Equivalent input noise w/o Noise reduction		27	23	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	12	-	
Frequency range (DIN 45605)		100-6710	100-6120	Hz
Current Drain (Quiescent / Operating)		1,3 / 1,5	1,3 / 1,5	mA
Typical Battery life time (Battery type 13)		207	207	hrs

Data in accordance with IEC 60118-0, IEC 60118-7: Supply Voltage 1.3 V.

Patents pending

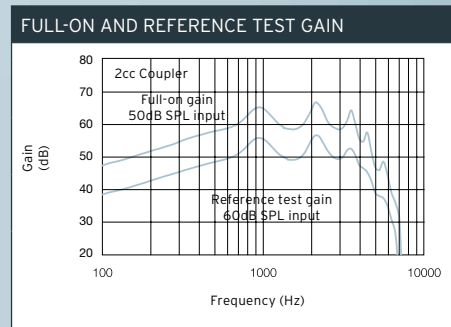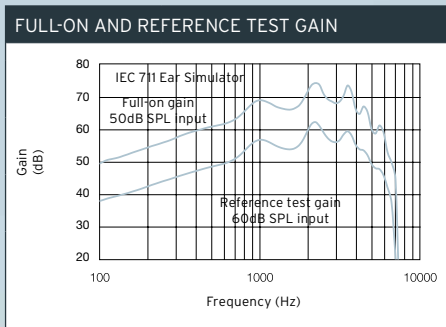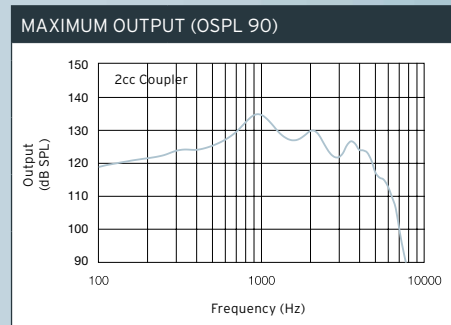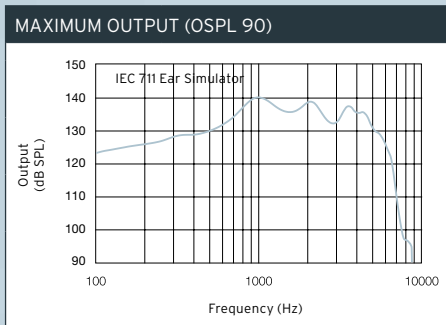

All specifications are subject to change without notice

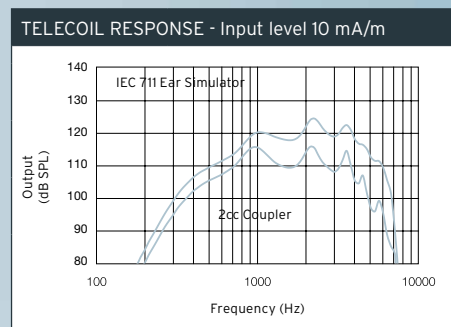

Classic configuration