



Interton Share
1.3

RIE SR1360-DVIR

Sound processing	
Logarithmic WDRC - Channels	8
Gain Handles	6
Microphone Noise Reduction	●
Adaptive Noise Reduction (-3dB)	●
Basics	
Signal tones	●
Speech understanding	
Omni Directionality	●
Fixed Directionality	●
Speech-focused Directionality	●
Auto-steered Directionality	●
Feedback management	
Feedback Manager Plus	●
Ease of use/Customization	
Flexible Comfort programs	2
Total program choices	4
Data logging	●
AutoPhone	●
Protection	
Nano Coating technology	●

Product Description

Interton Share™ is a family of hearing devices that are reliable, easy to use and bring great listening experiences to people - at a very affordable price.


It's available in different styles, colors and power options to suit your customers' individual needs.

Standard Configuration

- Nano Coating technology
- Choice of Normal Power (NP) and High Power (HP) receivers
- Supports Open and Closed configurations for Normal Power (NP).
- Selection of domes and custom moulds to fit ear canal size and hearing loss needs
- Multi-Function button to adjust volume and comfort programs
- 312 battery option
- Battery door with integrated On/Off switch
- 5 color options
- Direct Audio Input
- AutoPhone functionality
- Telecoil

Fitting Requirements

- Appraise 2.2 Fitting Software or higher
- Programming adaptor with CS44 socket cable
- Speedlink™, HI-PRO or NoahLink interface (Speedlink recommended)

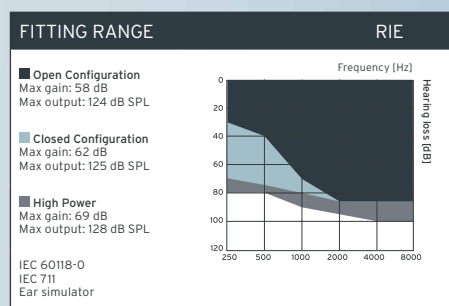

Technical specifications

SR1360-DVIR Normal Power (NP) Open			
SR1360-DVIR Normal Power (NP) Closed			
IEC 60118-0 IEC 711 Ear simulator		IEC 60118-7-2005 2cc coupler	
Open	Closed	Open	Closed

Reference test gain (60 dB SPL input)	1600 Hz/HFA	38	39	30	32	dB
	2500 Hz/HFA	42	45	-	-	
Full-on gain (50 dB SPL input)	Max.	58	62	47	50	dB
	1600 Hz/HFA	49	50	41	42	
	2500 Hz/HFA	53	57	-	-	
Maximum output (90 dB SPL input)	Max.	124	125	114	114	dB SPL
	1600 Hz/HFA	117	116	108	108	
	2500 Hz/HFA	120	121	-	-	
Total harmonic distortion	800 Hz	1,3	1,4	0,8	0,9	%
	1600 Hz	1,0	1,1	0,7	0,8	
Telecoil sensitivity (1 mA/m input)*	Max.	89	92	-	-	dB SPL
Full-on Telecoil sensitivity @ 1mA/m	1600 Hz/HFA	80	81	71	72	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	-	-	90	91	
Equivalent input noise w/o Noise reduction		24	24	24	25	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	12	12	-	-	
Frequency range (DIN 45605)		100-6940	100-6880	100-6790	100-6720	Hz
Current Drain SR1360 (Quiescent/Operating)		1,2 / 1,3	1,2 / 1,3	1,2 / 1,3	1,2 / 1,3	mA
Typical Battery life time (Battery type 312)		123	123	123	123	hrs

Data in accordance with IEC 60118-0, IEC 60118-7, Supply Voltage 1.3 V.

Technical specifications







SR1360-DVIR High Power (HP) Closed			
IEC 60118-0 IEC 711 Ear simulator		IEC 60118-7-2005 2cc coupler	
Closed	Closed	Closed	Closed

Reference test gain (60 dB SPL input)	1600 Hz/HFA	45	35	dB
	2500 Hz/HFA	50	-	
Full-on gain (50 dB SPL input)	Max.	69	58	dB
	1600 Hz/HFA	57	49	
	2500 Hz/HFA	62	-	
Maximum output (90 dB SPL input)	Max.	128	117	dB SPL
	1600 Hz/HFA	120	112	
	2500 Hz/HFA	123	-	
Total harmonic distortion	800 Hz	2,4	1,0	%
	1600 Hz	0,8	0,8	
Telecoil sensitivity (1 mA/m input)*	Max.	99	-	dB SPL
Full-on Telecoil sensitivity @ 1mA/m	1600 Hz/HFA	88	79	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	-	96	
Equivalent input noise w/o Noise reduction		24	26	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	11	-	
Frequency range (DIN 45605)		100-7170	100-7140	Hz
Current Drain SR1360 (Quiescent/Operating)		1,2 / 1,3	1,2 / 1,4	mA
Typical Battery life time (Battery type 312)		123	114	hrs

Data in accordance with IEC 60118-0, IEC 60118-7, Supply Voltage 1.3 V.

Patents pending







All specifications are subject to change without notice

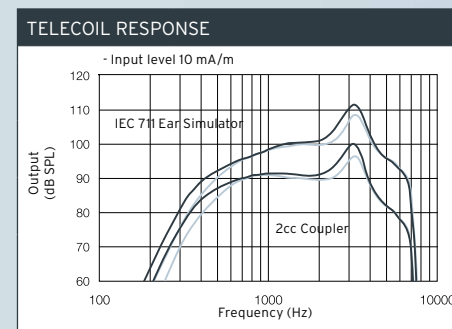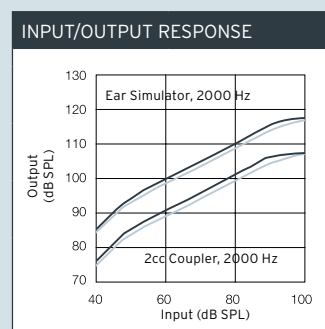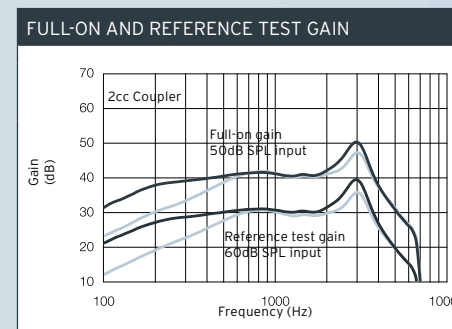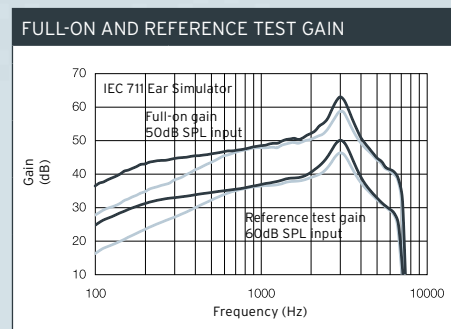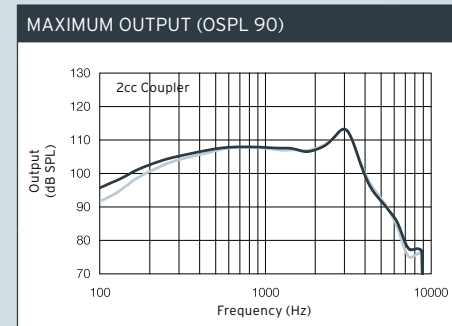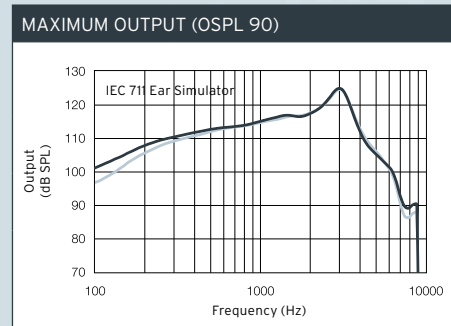

■ Closed configuration
■ Open configuration

Patents pending

All specifications are subject to change without notice

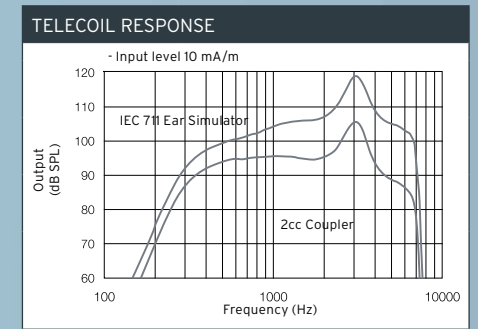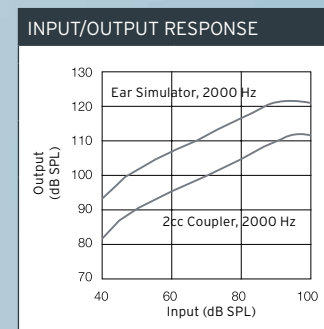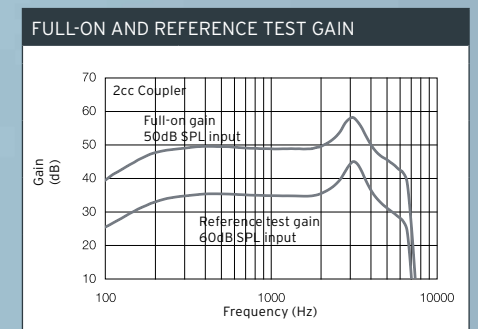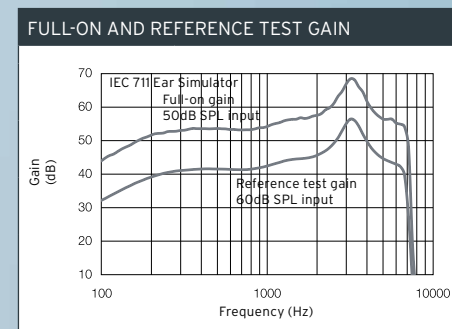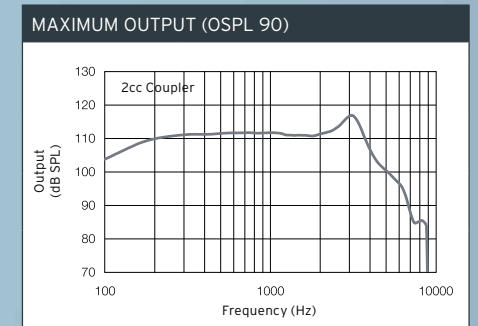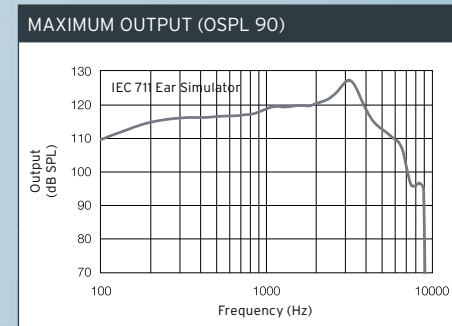

■ Closed configuration