



Interton Share

Interton Share 1.1

Product Description

Interton Share™ is a family of quality hearing aids that are easy to use and bring great listening experiences to people - at a very affordable price.

The products are available in different styles, colors and power options to suit your customers' individual needs.

Standard Configuration

- Nano Coating technology
- Push button
- Analogue, numbered Volume Control
- Size 13 battery
- Battery door with integrated On/Off switch
- Up to 5 color options
- Telecoil with T and MT modes
- Direct Audio Input
- Supports Standard Earmould
- Standard hook, mini hook


Fitting Requirements

- Appraise 2.1 Fitting Software or higher
- Programming adaptor with CS44 socket cable
- Speedlink™, HI-PRO or NoahLink interface (Speedlink recommended)

STANDARD BTE SR1170-VI

Sound processing	
Logarithmic WDRC - Channels	4
Gain Handles	4
Basics	
Signal tones	●
Speech understanding	
Omni Directionality	●
Feedback management	
Feedback Manager	●
Ease of use/Customization	
Flexible Comfort programs	1
Total program choices	2
Protection	
Nano Coating technology	●

Fitting Range

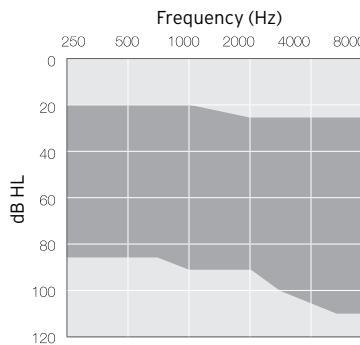


Technical specifications

SR1170-VI	
IEC 60118-0 IEC 711 Ear simulator	IEC 60118-7:2005 2cc coupler
Closed	Closed


Reference test gain (60 dB SPL input)	1600 Hz/HFA	48	44	dB
Full-on gain (50 dB SPL input)	Max.	69	61	dB
	1600 Hz/HFA	60	56	
Maximum output (90 dB SPL input)	Max.	133	128	dB SPL
	1600 Hz/HFA	127	121	
Total harmonic distortion	500 Hz	1,4	1,2	%
	800 Hz	1,6	1,1	
	1600 Hz	0,7	0,5	
Telecoil sensitivity (1 mA/m input) Full-on Telecoil sensitivity @ 1mA/m HFA - SPLIV @ 31.6 mA/m (ANSI)	Max.	97	-	dB SPL
	1600 Hz / HFA	88	84	
	HFA	-	103	
Equivalent input noise w/o Noise reduction 1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	29 15	25 -	dB SPL
Frequency range (DIN 45605)		130-6420	100-6200	Hz
Current Drain		1,3	1,3	mA

Data in accordance with IEC 60118-0, IEC 60118-7, Supply Voltage 1.3 V.


Maximum Output (OSPL 90)

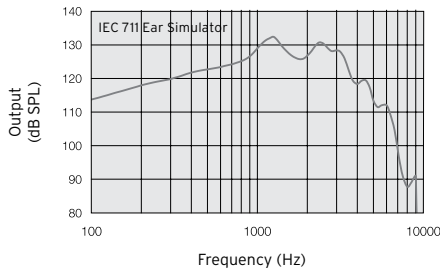


Maximum Output (OSPL 90)

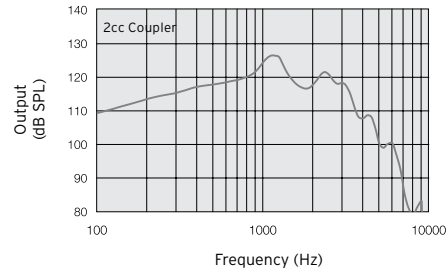


Full-On and Reference Test Gain

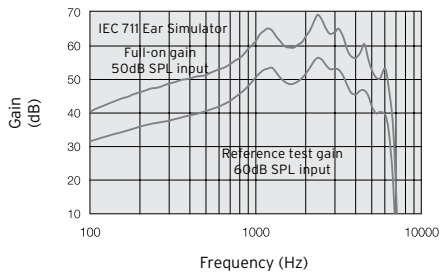


Full-On and Reference Test Gain

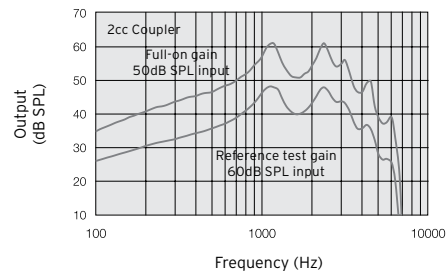

Input/Output Response

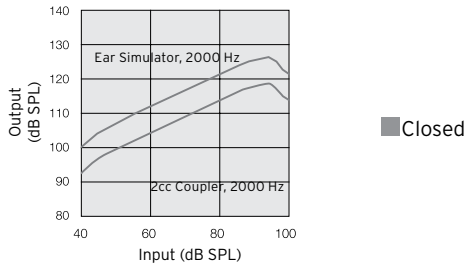

Telecoil response
- Input level 10 mA/m

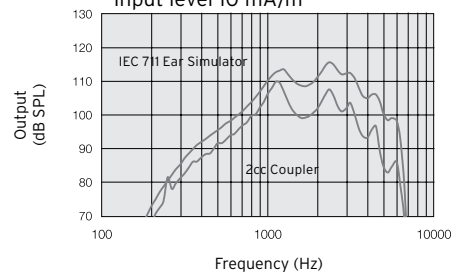

Patents pending

All specifications are subject to change without notice

Worldwide Headquarters
Interton A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
interton.com
CVR no. 55082715

United Kingdom
GN Hearing UK Ltd.
Kirtlington Business Centre
Portway, Kirtlington
Oxon OX5 3JA
Tel.: +44 1869 352 800
interton.com

Australia
GN Hearing Australia Pty. Ltd.
Gate C, 19-25 Khartoum Road
Macquarie Technology Park
Macquarie Park NSW 2113
Tel.: (free) 1800 658 955
interton.com

New Zealand
GN Hearing NZ Ltd.
Ground Floor, North Entrance
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel.: (free) 0800 900 126
interton.com

Singapore
GN Hearing Pte. Ltd.
2 Kallang Avenue
#07-19 CT HUB
Singapore - 339407
Tel.: +65 6320 9388
interton.com