





ITE

| Model | MV6ITE-DW | MV4ITE-DW | MV3ITE-DW |
|--|---------------------------------------|-----------|-----------|
| Device Configurations | | | |
| Battery size | 312/13 Zinc-Air | | |
| Receiver power levels | MP, HP & UP | | |
| Control option | Push button, Volume control, Telecoil | | |
| Sound quality | | | |
| WARP compression (WDRC), number of channels | 17 | 12 | 8 |
| Compression Mode (only UP receivers) | ● | ● | ● |
| Comfort | | | |
| Adaptive Noise Reduction | ● | ● | ● |
| Adaptive Wind Noise Reduction | ● | ● | ● |
| Impulse Noise Reduction | ● | ● | ● |
| Microphone Noise Reduction | ● | ● | ● |
| Environmental Gain Tuner | ● | ● | ● |
| Environmental Classifier | ● | ● | ● |
| Speech Understanding | | | |
| Integrated Directionality | ● | ● | ● |
| Automatic Beamwidth | ● | ● | ● |
| Combined Directionality | ● | ● | ● |
| Synchronised Auto-Steered Directionality | ● | ● | ● |
| Auto-Steered Directionality | ● | ● | ● |
| Selectable Beamwidth | ● | ● | ● |
| Speech-focused Directionality | ● | ● | ● |
| Feedback management | | | |
| Feedback Manager Plus | ● | ● | ● |
| Music Mode | ● | ● | ● |
| Preset Feedback Manager | ● | ● | ● |
| Onboarding | | | |
| Synchronised Acclimatization Manager | ● | ● | ● |
| Acclimatization Manager | ● | ● | ● |
| Convenience | | | |
| Ear to Ear Communication (Push Button, Volume Control) | ● | ● | ● |
| Power-on-delay | ● | ● | ● |
| AutoPhone | ● | ● | ● |
| Comfort Phone | ● | ● | ● |
| Direct audio streaming (MFi, Android™*) | ● | ● | ● |
| TV Streamer 2, Remote Control, Remote Control 2, Phone Clip 2, Micro Mic and Multi Mic | ● | ● | ● |
| Interton Sound™ app | ● | ● | ● |
| Remote Firmware Update | ● | ● | ● |
| Fitting Features | | | |
| Interton Fitting™ 1.10 or higher | ● | ● | ● |
| Number of Programs | 4 | 4 | 4 |
| Low Frequency Boost (Only UP) | ● | ● | ● |
| Tinnitus Sound Generator | ● | ● | ● |
| Datalogging | ● | ● | ● |
| Wireless Fitting with Noahlink Wireless | ● | ● | ● |

* Compatible with Android smartphones that support direct Android streaming to hearing aids.

Fitting range

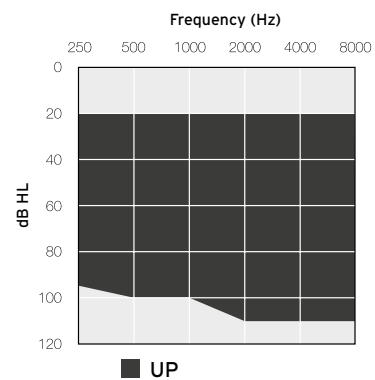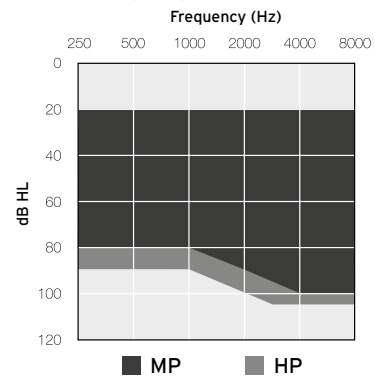

Technical Specifications

| | | MP | | HP | | | |
|--|---------------------|---|--|---|--|---------|--|
| | | IEC 60118-0:1983_AMD1:1994 IEC 60118-0:2015(*) IEC 711 Ear simulator | ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler | IEC 60118-0:1983_AMD1:1994 IEC 60118-0:2015(*) IEC 711 Ear simulator | ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler | | |
| Reference test gain (60 dB SPL input) | 1600 Hz/HFA | 39 | 37 | 47 | 42 | dB | |
| Full-on gain (50 dB SPL input) | Max. 1600 Hz/HFA | 59 | 50 | 69 | 60 | dB | |
| Maximum output (90 dB SPL input) | Max. 1600 Hz/HFA | 128 | 118 | 130 | 120 | dB SPL | |
| Total harmonic distortion | 500 Hz | 0.4 | 0.3 | 0.8 | 0.5 | % | |
| | 800 Hz | 0.7 | 0.4 | 1.9 | 0.8 | | |
| | 1600 Hz | 0.6 | 0.5 | 0.8 | 0.6 | | |
| | 3200 Hz | | 0.3 | | 0.2 | | |
| Telecoil sensitivity (1 mA/m input) | Max. | 90 | 79 | 100 | 91 | dB SPL | |
| HFA - SPLIV @ 31.6 mA/m (ANSI) | HFA | 103 | 98 | 111 | 103 | | |
| Full-on telecoil sensitivity @ 1mA/m | 1600 Hz/HFA | 82 | 76 | 90 | 84 | | |
| Equivalent input noise, w/o Noise reduction | | 25 | 23 | 26 | 24 | dB SPL | |
| 1/3 Octave Equivalent input noise, w/o Noise reduction | 1600 Hz | 10 | 10 | 11 | 11 | dB SPL | |
| Frequency range IEC 60118-0: 2015 | | 100-8440* | 100-8120 | 100-7390* | 100-6710 | Hz | |
| Current Drain (Quiescent / Operating) | | 1.17/1.19 | 1.17/1.31 | 1.15/1.18 | 1.15/1.25 | mA | |
| Weight of hearing aid | | 3.98 / 0.14 | | 4.15 / 0.15 | | gram/oz | |

* Measured according to IEC 60118-0:2015, with 711-Ear simulator coupler.


Technical Specifications

| | | UP | | | |
|--|---------------------|---|--|---------|--|
| | | IEC 60118-0:1983_AMD1:1994 IEC 60118-0:2015(*) IEC 711 Ear simulator | ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler | | |
| Reference test gain (60 dB SPL input) | 1600 Hz/HFA | 60 | 47 | dB | |
| Full-on gain (50 dB SPL input) | Max. 1600 Hz/HFA | 78 | 70 | dB | |
| Maximum output (90 dB SPL input) | Max. 1600 Hz/HFA | 137 | 129 | dB SPL | |
| Total harmonic distortion | 500 Hz | 0.4 | 0.4 | % | |
| | 800 Hz | 1.0 | 0.5 | | |
| | 1600 Hz | 0.2 | 0.1 | | |
| | 3200 Hz | | 0.1 | | |
| Telecoil sensitivity (1 mA/m input) | Max. | 109 | 100 | dB SPL | |
| HFA - SPLIV @ 31.6 mA/m (ANSI) | HFA | 119 | 109 | | |
| Full-on telecoil sensitivity @ 1mA/m | 1600 Hz/HFA | 103 | 93 | | |
| Equivalent input noise, w/o Noise reduction | | 20 | 23 | dB SPL | |
| 1/3 Octave Equivalent input noise, w/o Noise reduction | 1600 Hz | 12 | 13 | dB SPL | |
| Frequency range IEC 60118-0: 2015 | | 100-5170* | 100-4810 | Hz | |
| Current Drain (Quiescent / Operating) | | 1.17/1.24 | 1.17/1.21 | mA | |
| Weight of hearing aid | | 4.53 / 0.16 | | gram/oz | |

* Measured according to IEC 60118-0:2015, with 711-Ear simulator coupler.

Patents pending

All specifications are subject to change without notice

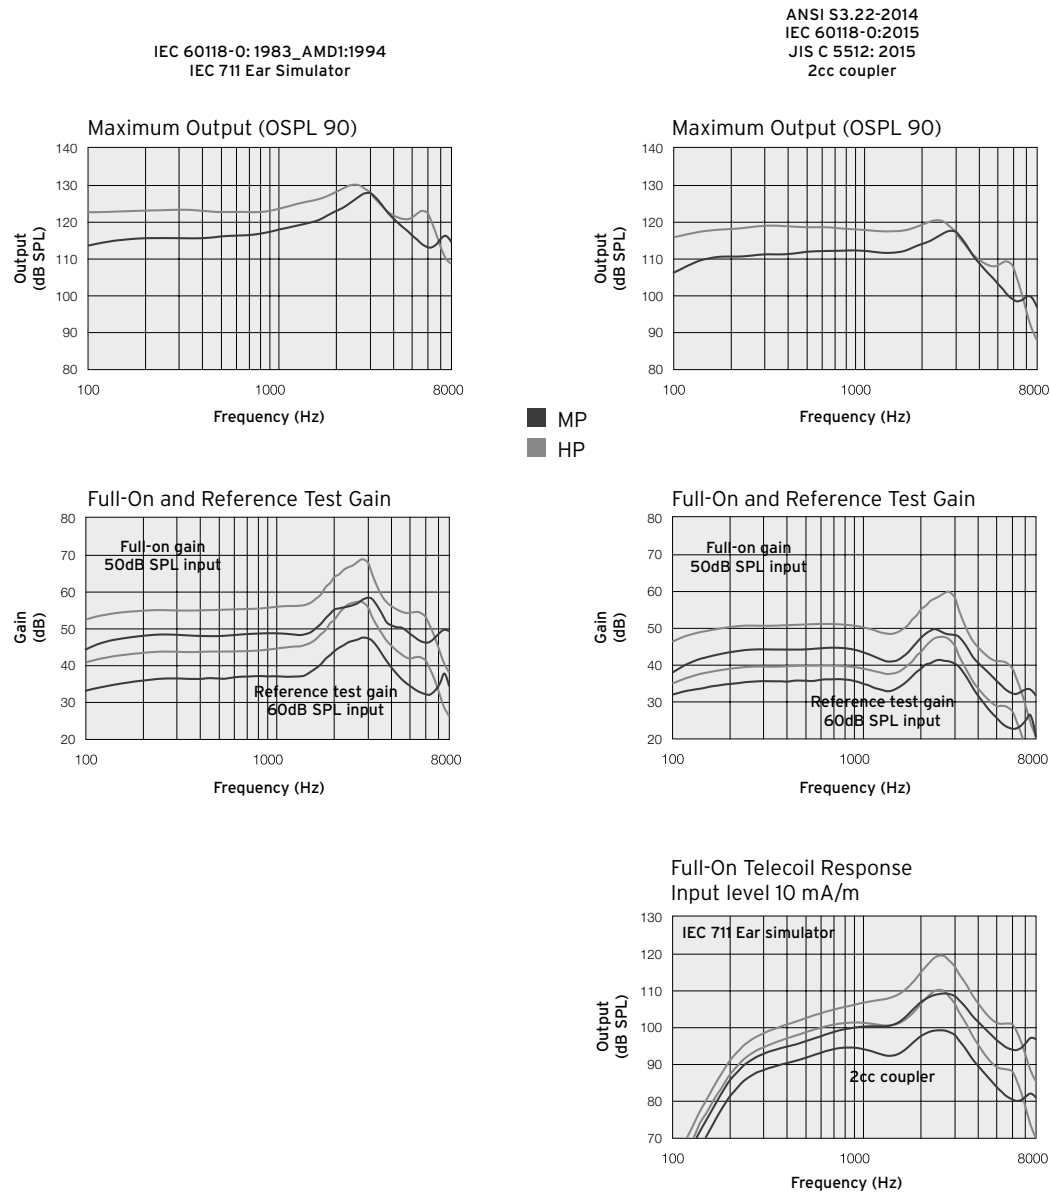

Patents pending

All specifications are subject to change without notice

